

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



01 FEB 2005



(43) International Publication Date
26 February 2004 (26.02.2004)


PCT

(10) International Publication Number
WO 2004/017007 A2

- (51) International Patent Classification⁷: **F28D 1/06**, 7/00, 7/02
- (21) International Application Number: **PCT/EP2003/008942**
- (22) International Filing Date: **8 August 2003 (08.08.2003)**
- (25) Filing Language: **English**
- (26) Publication Language: **English**
- (30) Priority Data:
0218442.2 9 August 2002 (09.08.2002) GB
0219372.0 20 August 2002 (20.08.2002) GB
0220159.8 30 August 2002 (30.08.2002) GB
- (71) Applicant (for all designated States except US): **ASHE MORRIS LIMITED** [GB/GB]; 6 Christchurch Crescent, Radlett, Hertfordshire, WD7 8AH (GB).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **ASHE, Robert** [GB/GB]; 6 Christchurch Crescent, Radlett, Hertfordshire WD7 8AH (GB). **MORRIS, David** [GB/GB]; Oak View, 1 Eversly Close, Appleton, Warrington, Cheshire WA4 5NW (GB).
- (74) Agent: **BAWDEN, Peter, Charles**; Bawden & Associates, 4 The Gatehouse, 2 High Street, Harpenden, Herts, AL5 2TH (GB).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
— without international search report and to be republished upon receipt of that report

[Continued on next page]

(54) Title: **REDUCED VOLUME HEAT EXCHANGERS**

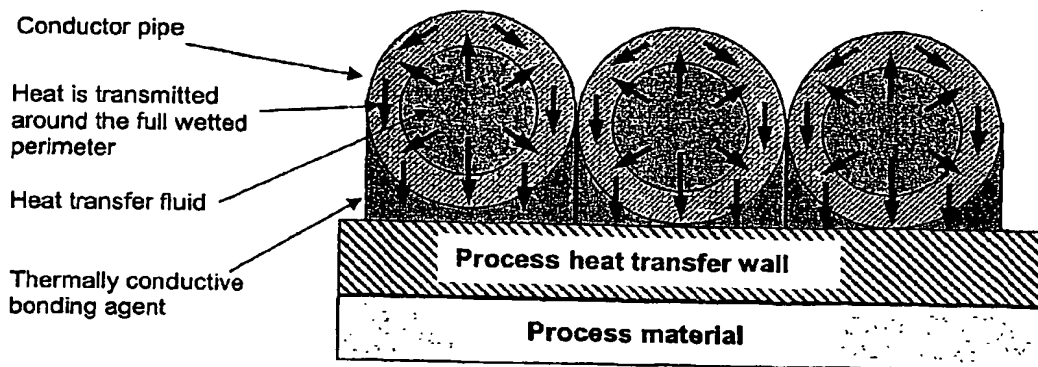

Section showing circular conductor pipes bonded to the heat transfer surface

(57) Abstract: A heat exchanger for delivery of heat transfer fluid to a process heat transfer surface is provided, the heat exchanger is in contact with a process fluid and the heat transfer surface comprises at least five heat transfer conduits each having a cross sectional area for the flow path of less than 2000 square millimetres wherein the linear velocity of the heat transfer fluid through the heat transfer conduits is from 0.5 to 20 m.s⁻¹ and adapted so that the temperature of the heat transfer fluid changes by at least 1 °C when they system is operating at design load, the exchanger enables more accurate temperature measurement and control in physical and chemical reactions. Also provided is a heat transfer system in which the heat transfer conduit for passage of the heat transfer fluid is attached to an expansion plate which is in contact with the heat transfer surface and enables independent movement of the heat transfer conduit and the heat transfer surface as their temperature change due to changes in temperature and/or pressure.

BEST AVAILABLE COPY

WO 2004/017007 A2